



IC - Transformer Selection Guide for T1/E1/CEPT/ISDN-PRI Quad Ports

IC Manufacturer	IC Part Number	Application	Turns Ratio Pri:Sec ±2%		Talema Part Number
			Transmit	Receive	
Mindspeed (Conexant)	BT8510	T1/E1	1:1/1.26	1:2CT	MJQ-007-40
	CN8380		1:2CT	1CT2	MJQ-020-40
	BT8370, BT8375, BT8376	Better RI	1:1.36CT	1:2CT	MJQ-001-40
	BT8370, BT8375, BT8376	Low Power	1:1.15	1:2CT	MJQ-002-40
Cirrus Logic (Crystal)	61318	120 E1	1:2CT	1:1CT	MJQ-003-40
	61577	T1/E1	1:2CT	1:2CT	MJQ-006-40
	61304A/5A/535A/547A/75	T1	1:1.15	1:2CT	MJQ-002-40
	61304A/5A/535A/547A/75	75 E1	1:2CT	1:1CT	MJQ-003-40
	61304A/5A/535A/547A/75	120 E1	1:1/1.26	1:2CT	MJQ-007-40
	61582, 61583		1:1.14	1:1.14CT	MJQ-009-40
	61310, 61581		1:2CT	1:1CT	MJQ-003-40
	61881		1:1.15	1:2CT	MJQ-002-40
	61584, 61584A	IQ3	1:2CT	1:2CT	MJQ-006-40
	61584, 61582, 61583, 61583A	IQ5	1:1.14	1:1.14CT	MJQ-009-40
Maxim (Dallas)	DS2196		1:2CT	1:1CT	MJQ-003-40
	DS2151, DS2152, DS2153, DS2154		1:1.15	1:2CT	MJQ-002-40
	DS2151, DS2152, DS2153, DS2154		1:1.36CT	1:2CT	MJS-001-40
	DS2148, DS21Q48	3V	1:2CT	1:1CT	MJQ-003-40
	DS2148, DS21Q48	5V	1:1.36CT	1:2CT	MJQ-001-40
	DS21352, DS21Q352, DS21354, DS21Q354		1:2CT	1:1CT	MJQ-003-40
	DS21552, DS21Q552, DS21554, DS21Q554		1:1.15	1:2CT	MJQ-002-40
	DS21552, DS21Q552, DS21554, DS21Q554		1:1.36CT	1:2CT	MJQ-001-40
Exar	T5683A, 59L91, T5894, T5897, T5997	-	1:2CT	1:2CT	MJQ-006-40
	T5791, T5993, T5994, T5995		1:1/1.26	1:2CT	MJQ-007-40
	T5684, T7288, 81L27, 82L24, 82D20		1:1.36CT	1:2CT	MJQ-001-40
	83L30, 83L34, 83L38		1:2CT	1:2CT	MJQ-006-40
Infineon (Siemens)	PEB2254, PEB2255	E1/T1/J1	1CT:1.41	1CT:1.41	MJQ-016-40
	PEB22504, PEB22554	3.3V	1:2.4	1:1	MJQ-022-40
	PEB22504	5V	1:1.5	1:41:1	MJQ-026-40
	PEB2256	3.3V E1/T1/J1	1:2.4	1:1	MJQ-022-40
Intel (Level One)	LXT300, LXT301	-	1:2CT	1:2CT	MJQ-006-40
	LXT304, LXT305, LXT307	E1/T1	1:2CT	1:2CT	MJQ-006-40
	LXT304, LXT305, LXT307	T1	1:1.15	1:2CT	MJQ-002-40
	LXT304, LXT305, LXT307	75E1, 120E1	1:1/1.26	1:2CT	MJQ-007-40
	LXT310, LXT317, LXT318		1:2CT	1:1CT	MJQ-003-40
	LXT331	E1/T1	1:2CT	1:1CT	MJQ-003-40
	LXT331, LXT332		1:2CT	1:2CT	MJQ-006-40
	LXT331, LXT332		1:1.15	1:2CT	MJQ-002-40
	LXT334, LXT335	E1/T1	1:2CT	1:2CT	MJQ-006-40
	LXT334, LXT335	120/75 E1	1:1.36CT	1:2CT	MJQ-001-40
	LXT334, LXT335	75 E1	1:1/1.26	1:2CT	MJQ-007-40
	LXT336		1:2CT	1:2CT	MJQ-006-40
	LXT350, LXT351, LXT359	E1/T1	1:2CT	1:1CT	MJQ-003-40
	LXT350, LXT351		1:1.15	1:2CT	MJQ-002-40
	LXT360, LXT361, LXT362, LXT363	T1 / E1	1:2CT	1:1CT	MJQ-003-40
	LXT360, LXT361, LXT362, LXT363		1:1.15	1:2CT	MJQ-002-40
LXT380/381/384/386/388	T1 / E1	1:2CT	1:1CT	MJQ-003-40	
LXT380/381/384/386/388	T1 / E1	1:2CT	1CT2	MJQ-020-40	
LXT3104, LXT3108		1:2CT	1:1CT	MJQ-003-40	
Lucent	T7288, T7290A	CEPT	1:1.36CT	1:2CT	MJQ-001-40
	T7289A	DS1	1:1.15	1:2CT	MJQ-002-40
	T7688, T7690, T7698	CEPT	1:1.36	1:1.36CT	MJQ-012-40
	T7688, T7690, T7698	DS1	1:1.14	1:1.14CT	MJQ-009-40
	T7693, T7697	CEPT	1:2.42	1:2.42	MJQ-028-40
	TLIU04C1	DS1	1:1.14	1:1.14CT	MJQ-009-40
	TLIU04C1	CEPT	1:1.36	1:1.36CT	MJQ-012-40
Zarlink (Mitel)	MT9071, MT9076		1:2.42	1:2.42	MJQ-028-40
	MT9075, MT9076		1:2.4	1:1	MJQ-022-40
	MT9074, MT9075		1:2CT	1:1CT	MJQ-003-40
PMC-Sierra	PM4341, PM6341, PM4314	-	1:1.36CT	1:2CT	MJQ-001-40
	PM4318	-	1:2CT	1:2CT	MJQ-006-40
	PM4351, PM4354	Comet	1:2.42	1:2.42	MJQ-028-40

Notes:

- Dallas IC's use either a 1:1.15 or a 1:1.36 ratio transformer depending on the application. Consult the Dallas application notes or contact Talema.
- P/N MJQ-007-J - To obtain a 1:1 secondary ratio connect the following secondary contacts: 40-39, 35-34, 30-29 and 25-24; a secondary ratio of 1:1.26 is obtained by connecting contacts: 40-38, 35-33, 30-28 and 25-23.



MJQ Series • T1/CEPT/E1/PRI Transformer Modules for Quad Ports

Features

- designed for optimum compatibility with all established interface IC's - see listing on last page
- module contains eight transformers for Quad T1/E1 Ports
- SMD design provides consistent and reliable coplanarity - fully pick and place compatible
- controlled parameters ensure full compliance with ITU-T G.703 when matched with recommended IC
- ideal for all 1.544 and 2.048 Mbs interface applications
- manufactured in an ISO-9001:2000, TS-16949:2002 and ISO-14001:2004 certified Talema facility
- 1500Vrms minimum isolation voltage
- extended operating temperature: -40° to +85°C



- fully RoHS compliant and meets lead free reflow level J-STD-020C

Electrical Specifications @ 25°C


Turns Ratio: **Bold** = IC side windings

MJQ Transformer Modules for Quad T1/E1 Ports

Part Number	Transformer	Turns Ratio (Pri:Sec +/-2%)	OCL (mH Min.)	L _L (µH Max)	C _{WV} (pF Max)	DCR (mOhms)		Pins		Schematic
						Pri	Sec	Primary	Secondary	
MJQ-001-40	Transmit	1:1.36CT	1.2	0.6	35	390	550	24-25, 29-30, 34-35, 39-40	16-18, 11-13, 6-8, 1-3	C
	Receive	1:2CT	1.2	0.6	35	390	780	4-5, 9-10, 14-15, 19-20	36-38, 31-33, 26-28, 21-23	
MJQ-002-40	Transmit	1:1.15	1.2	0.6	35	390	450	1-2, 6-7, 11-12, 16-17	39-40, 34-35, 29-30, 24-25	A
	Receive	1:2CT	1.2	0.6	35	390	780	21-23, 26-28, 31-33, 36-38	18-20, 13-15, 8-10, 3-5	
MJQ-003-40	Transmit	1:2CT	1.2	0.6	35	390	780	1-2, 6-7, 11-12, 16-17	38-40, 33-35, 28-30, 23-25	B
	Receive	1:1CT	1.2	0.6	35	390	390	21-22, 26-27, 31-32, 36-37	18-20, 13-15, 8-10, 3-5	
MJQ-006-40	Transmit	1:2CT	1.2	0.6	35	390	780	4-5, 9-10, 14-15, 19-20	36-38, 31-33, 26-28, 21-23	C
	Receive	1:2CT	1.2	0.6	35	390	780	24-25, 29-30, 34-35, 39-40	16-18, 11-13, 6-8, 1-3	
MJQ-007-40	Transmit	1:1/1.26	1.2	0.6	35	390	490	1-2, 6-7, 11-12, 16-17	38-40, 33-35, 28-30, 23-25	B
	Receive	1:2CT	1.2	0.6	35	390	780	21-22, 26-27, 31-32, 36-37	18-20, 13-15, 8-10, 3-5	
MJQ-009-40	Transmit	1:1.14	1.2	0.6	35	390	440	1-2, 6-7, 11-12, 16-17	39-40, 34-35, 29-30, 24-25	A
	Receive	1:1.14CT	1.2	0.6	35	390	440	36-38, 31-33, 26-28, 21-23	3-5, 8-10, 13-15, 18-20	
MJQ-012-40	Transmit	1:1.36	1.2	0.4	20	390	540	1-2, 6-7, 11-12, 16-17	39-40, 34-35, 29-30, 24-25	A
	Receive	1:1.36CT	1.2	0.5	20	390	540	36-38, 31-33, 26-28, 21-23	3-5, 8-10, 13-15, 18-20	
MJQ-015-40	Transmit	1:1.15	1.2	0.6	35	390	450	1-3, 6-8, 11-13, 16-18	38-40, 33-35, 28-30, 23-25	E
	Receive	1:1.15	1.2	0.6	35	390	450	4-5, 9-10, 14-15, 19-20	36-37, 31-32, 26-27, 21-22	
MJQ-016-40	Transmit	1CT:1.41	1.2	0.6	35	420	580	1-3, 6-8, 11-13, 16-18	39-40, 34-35, 29-30, 24-25	C
	Receive	1CT:1.41	1.2	0.6	35	420	580	21-23, 26-28, 31-33, 36-38	19-20, 14-15, 9-10, 4-5	
MJQ-017-40	Transmit	1:2	1.2	0.6	35	390	780	1-3, 6-8, 11-13, 16-18	38-40, 33-35, 28-30, 23-25	E
	Receive	1:2	1.2	0.6	35	390	780	4-5, 9-10, 14-15, 19-20	36-37, 31-32, 26-27, 21-22	
MJQ-020-40	Transmit	1:2CT	1.2	0.6	35	390	780	4-5, 9-10, 14-15, 19-20	36-38, 31-33, 26-28, 21-23	C
	Receive	1CT:2	1.2	0.6	35	390	780	1-3, 6-8, 11-13, 16-18	39-40, 34-35, 29-30, 24-25	
MJQ-021-40	Transmit	1:2	1.2	0.6	35	390	780	1-2, 9-10, 11-12, 19-20	39-40, 31-32, 29-30, 21-22	D
	Receive	1:2CT	1.2	0.6	35	390	780	23-25, 26-28, 33-35, 36-38	16-18, 13-15, 6-8, 3-5	
MJQ-022-40	Transmit	1:2.4	1.0	0.5	35	390	390	1-2, 8-9, 11-12, 18-19	39-40, 32-33, 29-30, 22-23	F
	Receive	1:1	1.0	0.5	35	410	900	24-25, 27-28, 34-35, 37-38	16-17, 13-14, 6-7, 3-4	
MJQ-023-40	Transmit	1:1.70	1.2	0.8	35	390	670	1-2, 6-7, 11-12, 16-17	39-40, 34-35, 29-30, 24-25	A
	Receive	1:1.36CT	1.2	0.6	35	390	540	21-23, 26-28, 31-33, 36-38	18-20, 13-15, 8-10, 3-5	
MJQ-024-40	Transmit	1:1.36CT	1.2	0.6	35	390	540	24-25, 29-30, 34-35, 39-40	16-18, 11-13, 6-8, 1-3	C
	Receive	1:1CT	1.2	0.6	35	390	390	4-5, 9-10, 14-15, 19-20	36-38, 31-33, 26-28, 21-23	
MJQ-026-40	Transmit	1:1.5	1.0	0.5	35	390	580	1-2, 8-9, 11-12, 18-19	39-40, 32-33, 29-30, 22-23	F
	Receive	1.41:1	1.0	0.5	35	390	390	24-25, 27-28, 34-35, 37-38	16-17, 13-14, 6-7, 3-4	
MJQ-028-40	Transmit	1:2.42	1.2	0.6	35	390	940	1-3, 6-8, 11-13, 16-18	38-40, 33-35, 28-30, 23-25	E
	Receive	1:2.42	1.2	0.6	35	390	940	4-5, 9-10, 14-15, 19-20	36-37, 31-32, 26-27, 21-22	
MJQ-029-40	Transmit	1:2.1CT	1.2	0.6	35	390	810	1-2, 6-7, 11-12, 16-17	38-40, 33-35, 28-30, 23-25	B
	Receive	1:2.1CT	0.6	0.6	35	280	590	21-22, 26-27, 31-32, 36-37	18-20, 13-15, 8-10, 3-5	
MJQ-030-40	Transmit	1:2.45CT	1.2	0.6	35	390	960	1-2, 6-7, 11-12, 16-17	38-40, 33-35, 28-30, 23-25	B
	Receive	1:2.45CT	0.6	0.6	35	280	690	21-22, 26-27, 31-32, 36-37	18-20, 13-15, 8-10, 3-5	
MJQ-031-40	Transmit	1:2/2.4	1.0	1.0	35	410	900	1-2, 9-10, 11-12, 19-20	38-40, 33-31, 30-28, 23-21	G
	Receive	1:0.79/1	1.0	1.0	35	390	390	37-36, 35-34, 27-26, 25-24	3-5, 6-8, 13-15, 16-18	


Packaging & Dimensions for SMD Quad Port Transformer Modules

MJQ Series Quad Module Package



Surface coplanarity will be <0.004 (0.10)

Suggested Pad Layout




Weight: ~5 grams

Dimensions: Inches (Millimeters)

Tolerance: ±0.010 (0.25) unless specified otherwise

Schematics

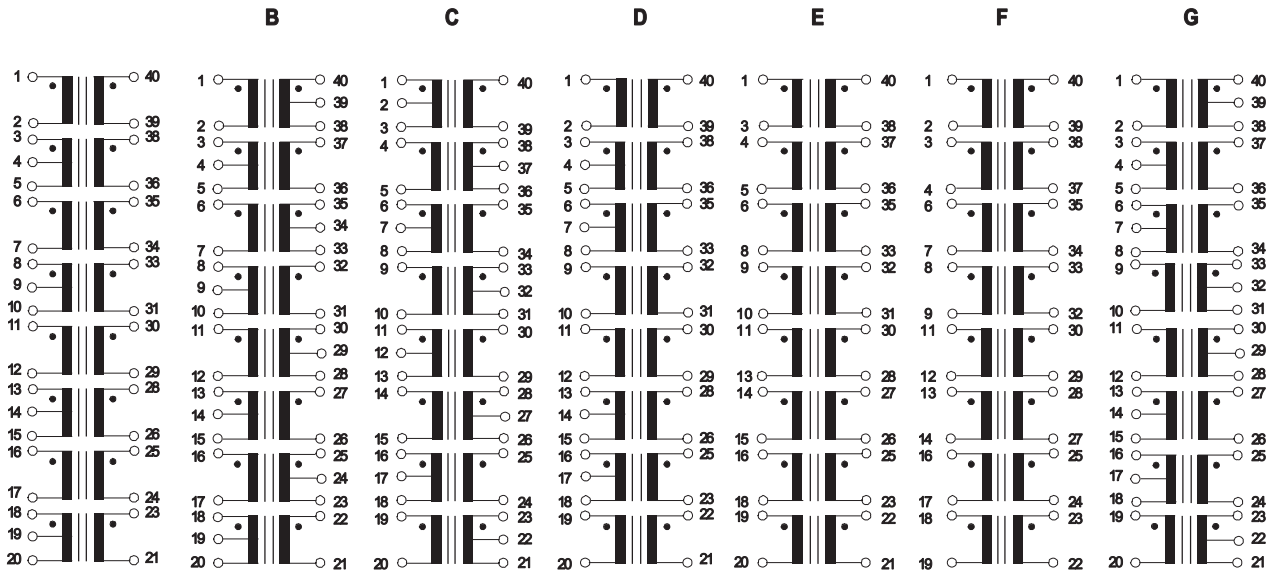

Sales & Marketing, Design and Manufacturing Facilities

<http://www.talema-nuvotem.com>

Eastern Europe & Czech Republic
NTMAGNETICS s.r.o.
Chebská 27
322 00 Plzeň
Tel: Int. + 420 377 - 338 351
Fax: Int. + 420 377 - 338 350
Email: talema@talema.cz
Web Site: www.ntmagnetics.cz

Germany
TALEMAELEKTRONIK GMBH
Sembdnerstr. 5, Postfach 2523
82110 Germering
Tel: Int. + 49 89 - 841 00 - 0
Fax: Int. + 49 89 - 841 00 25
Email: info@talema.de

Ireland
NUVOTEMTEO.
Crolly
Co. Donegal
Tel: Int. + 353 74 - 954 8666
Fax: Int. + 353 74 - 954 8139
Email: info@nuvotem.com

India
TALEMA ELECTRONIC PVT. LTD.
Opposite the SIDCO Industrial Estate
Gins Towers
4/5S.H/1, Omalur Main Road
Salem - 636 004, Tamil Nadu
Tel: Int. + 91 427 - 244 1325
Fax: Int. + 91 427 - 243 0034
E-mail: talema@talemaindia.com
Web Site: www.talemaindia.com

THE TALEMA GROUP • Magnetic Components for ISDN / xDSL / LAN Data Communications

(10-06) Communications/E1/T1/MJQ-XXX-40