



ATM 25MBPS Pulse Transformer for Novacom & SEEQ PHY Interface

Features

- Meets ATM 25.6 PHY specifications providing compatibility with Novacom NOV25PMD6 and SEEQ 93C95 PHY interface
- Impedence matching for 100 ohm UTP applications
- Low profile, light weight SMD packages for high density board placement
- Designed for pick and place compatability while providing consistant and reliable coplanarity
- Excellent quality at extremely competitive price due to high volume production
- Manufactured in an ISO-9001:2000, TS-16949:2002 and ISO-14001:2004 certified Talema facility
- Fully RoHS compliant and meets lead free reflow level J-STD-020C



Electrical Specifications @ 25°C

Operating Temperature Range: -40°C to +85°C

Storage Temperature: -40°C to +125°C

Minimum isolation voltage: 1500 Vrms


Standard Packaging: Tape & Reel

Quality and consistency is guaranteed through 100% testing of the specified parameters for primary inductance, leakage inductance, turns ratio, DC resistance and interwinding capacitance. This ensures that the return loss and pulse wave shape requirements can be fully maintained. Additionally, all parts are tested for 1500V minimum isolation.

Pulse Transformer for Impedance matching for 100 ohm UTP Applications

Part Number	Turns Ratio ±2%		OCL (µHMin.)	L _L (µH max)	C _{WW} (pF max)	DCR (Ohms max)
UTM-3000-J	1:1	1ct:1	3000	1.6	55	1.3

UTM Miniature Module

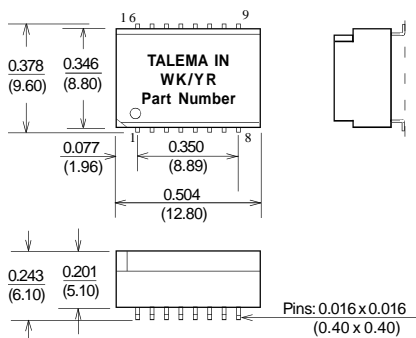


Surface coplanarity 0.004 (0.10) maximum


Dimensions: Inches (Millimeters)

Tolerance: ±0.010 (0.25) unless specified otherwise

Suggested Pad Layout



Schematic



Sales & Marketing, Design and Manufacturing Facilities

<http://www.talema-nuvotem.com>

Eastern Europe & Czech Republic

NT MAGNETICS s.r.o.
Chebská 27
322 00 Plzeň
Tel: Int. + 420 377 - 338 351
Fax: Int. + 420 377 - 338 350
Email: talema@talema.cz
Web Site: www.ntmagnetics.cz

Germany

TALEMAELEKTRONIK GMBH
Sembdnerstr. 5, Postfach 2523
82110 Germering
Tel: Int. + 49 89 - 841 00 - 0
Fax: Int. + 49 89 - 841 00 25
Email: info@talema.de

Ireland

NUVOTEM TEO.
Crolly
Co. Donegal
Tel: Int. + 353 74 - 954 8666
Fax: Int. + 353 74 - 954 8139
Email: info@nuvotem.com

India

TALEMA ELECTRONIC PVT. LTD.
Opposite the SIDCO Industrial Estate
Gins Towers
4/5S.H/1, Omalur Main Road
Salem - 636 004, Tamil Nadu
Tel: Int. + 91 427 - 244 1325
Fax: Int. + 91 427 - 243 0034
E-mail: talema@talemaindia.com
Web Site: www.talemaindia.com